

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
21 June 2001 (21.06.2001)

PCT

(10) International Publication Number
WO 01/45300 A1


- (51) International Patent Classification: H04B 7/02, 15/00, H04L 1/02 (74) Agent: SHORT, Brian, R.; Iospan Wireless, Inc., P.O. Box 641867, San Jose, CA 95164-1867 (US).
- (21) International Application Number: PCT/US00/32994 (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 5 December 2000 (05.12.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/464,372 15 December 1999 (15.12.1999) US
- (71) Applicant: IOSPAN WIRELESS, INC. [US/US]; 3099 N. First Street, San Jose, CA 95134 (US).
- (72) Inventors: PAULRAJ, Arogyaswami, J.; 3099 N. First Street, San Jose, CA 95134 (US). GESBERT, David, J.; 3099 N. First Street, San Jose, CA 95134 (US). SEBASTIAN, Peroor, K.; 3099 N. First Street, San Jose, CA 95134 (US). TELLADO, Jose; 3099 N. First Street, San Jose, CA 95134 (US).
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

[Continued on next page]

(54) Title: METHOD AND WIRELESS SYSTEMS USING MULTIPLE ANTENNAS AND ADAPTIVE CONTROL FOR MAXIMIZING A COMMUNICATION PARAMETER



(57) Abstract: A method of maximizing a communication parameter, such as data capacity, signal quality or throughput of a channel between a transmit unit (12) with M transmit antennas (18A...18M) and a receive unit (14) with N receive antennas (20A...20N) and a communication system employing the method. The data is first processed to produce parallel spatial-multiplexed streams S_{Mi}, where i=1...k, which are converted or mapped to transmit signals TS_p, where p=1...M, assigned for transmission from the M transmit antennas (18A...18M). Corresponding receive signals RS_j, where j=1...N, are received by the N receive antennas (20A...20N) of the receiver and used to assess a quality parameter, such as a statistical signal parameter or a parameter of the data. The quality parameter is used to adaptively adjust k as well as other parameters to transmit antennas such that the communication parameter of the channel is maximized.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD AND WIRELESS SYSTEMS USING MULTIPLE ANTENNAS AND ADAPTIVE CONTROL FOR MAXIMIZING A COMMUNICATION PARAMETER

FIELD OF THE INVENTION

The present invention relates generally to wireless communication systems and methods of using transmit and receive units with multiple antennas to adapt the transmissions to channel conditions and maximize a communication parameter.

BACKGROUND OF THE INVENTION

Wireless communication systems serving stationary and mobile wireless subscribers are rapidly gaining popularity. Numerous system layouts and communications protocols have been developed to provide coverage in such wireless communication systems.

The wireless communications channels between the transmit and receive devices are inherently variable and thus their quality fluctuates. Hence, their quality parameters also vary in time. Under good conditions wireless channels exhibit good communication parameters, e.g., high signal-to-noise ratio, large data capacity and/or throughput. At these times significant amounts of data can be transmitted via the channel reliably. However, as the channel changes in time, the communication parameters also change. Under altered conditions former data rates, coding techniques and data formats may no longer be feasible. For example, when the channel performance is degraded the transmitted data may experience excessive corruption yielding unacceptable communication parameters. For instance, transmitted data can exhibit excessive bit-error rates or packet error rates. The degradation of the channel can be due to a multitude of factors such as general noise in the channel, multi-path fading, loss of line-of-sight path, excessive Co-Channel Interference (CCI) and other factors.

By reducing CCI the carrier-to-interference (C/I) ratio can be improved and the spectral efficiency increased. Specifically, improved C/I ratio yields higher per link bit rates, enables more aggressive frequency re-use structures and increases the coverage of the system.

It is also known in the communication art that transmit units and receive units equipped with antenna arrays, rather than single antennas, can improve receiver performance. Antenna arrays can both reduce multipath fading of the desired signal and suppress interfering signals or CCI. Such arrays can consequently increase both the range and capacity of wireless systems. This is true for wireless cellular telephone and other mobile systems as well as Fixed Wireless Access (FWA) systems.

In mobile systems, a variety of factors cause signal degradation and corruption. These include interference from other cellular users within or near a given cell. Another source of signal degradation is multipath fading, in which the received amplitude and phase of a signal varies over time. The fading rate can reach as much as 200 Hz for a mobile user traveling at 60 mph at PCS frequencies of about 1.9 GHz. In such environments, the problem is to cleanly extract the signal of the user being tracked from the collection of received noise, CCI, and desired signal portions summed at the antennas of the array.

In FWA systems, e.g., where the receiver remains stationary, signal fading rate is less than in mobile systems. In this case, the channel coherence time or the time during which the channel estimate remains stable is longer since the receiver does not move. Still, over time, channel coherence will be lost in FWA systems as well.

Antenna arrays enable the system designer to increase the total received signal power, which makes the extraction of the desired signal easier. Signal recovery techniques using adaptive antenna arrays are described in detail, e.g., in the handbook of Theodore S. Rappaport, *Smart Antennas, Adaptive Arrays, Algorithms, & Wireless*

Position Location; and Paulraj, A.J et al., "Space-Time Processing for Wireless Communications", IEEE Signal Processing Magazine, Nov. 1997, pp. 49-83.

Prior art wireless systems have employed adaptive modulation of the transmitted signals with the use of feedback from the receiver as well as adaptive coding and receiver feedback to adapt data transmission to changing channel conditions. However, effective maximization of channel capacity with multiple transmit and receive antennas is not possible only with adaptive modulation and/or coding.

In U.S. Patent Nos. 5,592,490 to Barratt, et al., 5,828,658 to Ottersten, et al., and 5,642,353 Roy III, teach about spectrally efficient high capacity wireless communication systems using multiple antennas at the transmitter; here a Base Transceiver Station (BTS) for Space Division Multiple Access (SDMA). In these systems the users or receive units have to be sufficiently separated in space and the BTS uses its transmit antennas to form a beam directed towards each receive unit. The transmitter needs to know the channel state information such as "spatial signatures" prior to transmission in order to form the beams correctly. In this case spatial multiplexing means that data streams are transmitted simultaneously to multiple users who are sufficiently spatially separated.

The disadvantage of the beam-forming method taught by Barratt et al., Ottersten et al., and Roy III is that the users have to be spatially well separated and that their spatial signatures have to be known. Also, the channel information has to be available to the transmit unit ahead of time and the varying channel conditions are not effectively taken into account. Finally, the beams formed transmit only one stream of data to each user and thus do not take full advantage of times when a particular channel may exhibit very good communication parameters and have a higher data capacity for transmitting more data or better signal-to-noise ratio enabling transmission of data formatted with a less robust coding scheme.

U.S. Patent No. 5,687,194 to Paneth, et al. describes a Time Division Multiple Access (TDMA) communication system using multiple antennas for diversity. The proposed system exploits the concept of adaptive transmit power and modulation. The power and modulation levels are selected according to a signal quality indicator fed back to the transmitter.

Addressing the same problems as Paneth et al., U.S. Pat. No. 5,914,946 to Avidor et al. teaches a system with adaptive antenna beams. The beams are adjusted dynamically as the channel changes. Specifically, the beams are adjusted as a function of a received signal indicator in order to maximize signal quality and reduce the system interference.

The last two patents certainly go far in the direction of adaptively changing multiple antenna systems to optimize performance with varying channel conditions. However, further improvements are desirable. In particular, it would be desirable to develop a system where both the transmit unit and receive unit take full advantage of multiple antennas to not only adaptively change the modulation and/or coding but also use suitable diversity scheme, spatial multiplexing order all at the same time. These adaptive changes would help to preserve the communication parameters of the channel maximized while the channel varies. Furthermore, it would be an advance in the art to develop a communications system which could take advantage of multiple antennas at the transmit and receive unit to adapt to changing channel conditions and maximize any of a number of desirable communication parameters such as data capacity, signal-to-noise ratio and throughput. This would permit the system to continuously adapt to the type of data being transmitted via the channel.

OBJECTS AND ADVANTAGES OF THE INVENTION

Accordingly, it is a primary object of the present invention to provide a method to maximize a communication parameter in a channel between a wireless transmit and receive unit, both using multiple antennas. Specifically, the method should permit to

continuously optimize data capacity, signal-to-noise ratio, signal quality, throughput and other desirable parameters while the channel varies.

It is a further object of the invention to provide a method which takes full advantage of multiple antennas at the transmit and receive unit to optimize a communication parameter of the channel using a quality parameter derived from the received signals.

Yet another object of the invention is to provide a method as indicated above in any wireless communication system using any combination of multiple access techniques such as TDMA, FDMA, CDMA, OFDMA.

It is also an object of the invention to provide a wireless communication system taking advantage of adaptive coding, spatial multiplexing, and antenna diversity to continuously maximize the desired communication parameters under varying channel conditions.

The above objects and advantages, as well as numerous other improvements attained by the method and apparatus of the invention are pointed out below.

SUMMARY

The objects and advantages of the invention are achieved by a method of maximizing a communication parameter, such as data capacity, signal quality or throughput of a channel between a transmit unit with M transmit antennas and a receive unit with N receive antennas. The data is first processed to produce parallel spatial-multiplexed streams SM_i , where $i=1...k$. Then, the spatial-multiplexed streams SM_i are converted or mapped to transmit signals TS_p , where $p=1...M$, assigned for transmission from the M transmit antennas.

The transmitted signals propagate through the channel and are received in the form of receive signals RS_j , where $j=1...N$, by the N receive antennas of the receiver. The receive signals RS_j are used to assess a quality parameter. The quality parameter

is used to adaptively adjust k such that the communication parameter of the channel is maximized.

In a preferred embodiment, each of the spatial-multiplexed streams SM_i is processed by a coding unit to produce coded streams CS_h , where $h=1...k'$. The quality parameter is utilized in the transmitter to adjust the coding, e.g., by changing k' , used by the coding unit. The coding unit can be a space-time coder, a space-frequency coder, and adaptive modulation rate coder or other suitable coding device. The space-time and space-frequency coders can use different coding and modulation rates.

At the receiver the receive signals RS_j are receive processed to reproduce the spatial-multiplexed streams SM_i . The quality parameter can be obtained from the receive processed streams SM_i . This can be accomplished by a statistical unit which examines streams SM_i . In this case the quality parameter can be signal-to-interference ratio, signal-to-noise ratio, power level, level crossing rate, level crossing duration of the signal of a predetermined threshold and reception threshold. Alternatively or in addition the quality parameter can be obtained from reconstituted data. In this case the quality parameter can be the bit-error-rate (BER) or packet error rate.

The mapping step at the transmitter preferably also includes a transmit processing step implemented by a transmit processing block. The quality parameter is then preferably also used for adjusting the processing of the transmit processing block.

Although the quality parameter is typically evaluated at the receiver and fed back or sent to the transmitter in any suitable way, e.g., over a reciprocal channel as used in Time Division Duplexed (TDD) systems, the analysis of the receive signals to derive the quality parameter can be performed by the transmitter. This can be advantageous, e.g., when the receiver does not have sufficient computational resources to derive the quality parameter.

The step of processing the data at the transmitter can be performed by using any suitable coding technique. For example, Space-Time coding or Space-Frequency

coding can be used. Meanwhile, the transmit signals TS_p are formatted in accordance to at least one multiple access technique such as TDMA, FDMA, CDMA, OFDMA.

The method of the invention can be used between any transmit and receive units including portable and stationary devices. In one embodiment, the method is employed in a wireless network such as a cellular communication system. In this case the method can be used to improve the communication parameter in both downlink and uplink communications.

The method of the invention can be used in existing systems having multiple receive and transmit antennas. The method also permits other useful methods to be employed concurrently. In particular, it is advantageous to use the techniques of the invention together with interference canceling.

A communication system employing the method of the invention achieves adaptive maximization of the communication parameter between its transmit and receive units. The transmit unit has a processing device for processing the data to produce the parallel spatial-multiplexed streams SM_i and an antenna mapping device for converting streams SM_i to transmit signals TS_p and mapping them to the M transmit antennas. The communication system is equipped with a unit for assessing the quality parameter of received signals RS_j . In addition, the communication system has a device for adaptively adjusting k based on the quality parameter to maximize the communication parameter. This device can be located in the transmit unit.

The unit for assessing the quality parameter is a statistical unit and is preferably located in the receive unit. Of course, the statistical unit can be located in the transmit unit, as may be advantageous when the receive unit has insufficient resources or power to support the statistical unit.

The communication system also has a coding unit for processing streams SM_i to produce coded streams CS_h ($h=1...k'$). The device for adjusting k then also has a mechanism for adjusting k' . The coding unit can be a space-time coder, space-

frequency coder or an adaptive modulation and coding rate coder. Preferably, a database of codes and transmit processing parameters is connected to the coding unit and the antenna mapping device.

An adaptive controller is connected to the processing device, the coding unit and the antenna mapping device. The adaptive controller adjusts these based on the quality parameter. Alternatively, the adaptive controller is connected just to the processing device and the antenna mapping device and adjusts them based on the quality parameter.

The communication system can employ any one or more the available multiple access techniques such as TDMA, FDMA, CDMA, OFDMA. This can be done in a wireless system, e.g., a cellular communication system.

A detailed description of the invention and the preferred and alternative embodiments is presented below in reference to the attached drawing figures.

BRIEF DESCRIPTION OF THE FIGURES

Fig. 1 is a simplified diagram illustrating a communication system in which the method of the invention is applied.

Fig. 2 is a simplified block diagram illustrating the transmit and receive units according to the invention.

Fig. 3 is a block diagram of an exemplary transmit unit in accordance with the invention.

Fig. 4 is a block diagram of an exemplary receive unit in accordance with the invention.

Fig. 5A is a block diagram illustrating the operation of the statistical units for deriving the quality parameter.

Fig. 5B is a block diagram illustrating the operation of alternative data analysis blocks for deriving a quality parameter from reconstituted data.

Fig. 6 is a block diagram of a portion of another embodiment of transmit unit in accordance with the invention.

Fig. 7 is a block diagram of a portion of a receive unit for receiving receive signals RS_j from the transmit unit of Fig. 6.

Fig. 8 illustrates performance curves for S-T code selection in accordance with the invention.

DETAILED DESCRIPTION

The method and wireless systems of the invention will be best understood after first considering the high-level diagrams of Figs. 1 and 2. Fig. 1 illustrates a portion of a wireless communication system 10, e.g., a cellular wireless system. For explanation purposes, the downlink communication will be considered where a transmit unit 12 is a Base Transceiver Station (BTS) and a receive unit 14 is a mobile or stationary wireless user device. Exemplary user devices include mobile receive units 14A, 14B, 14C which are portable telephones and car phones and stationary receive unit 14D, which can be a wireless modem unit used at a residence or any other fixed wireless unit. Of course, the same method can be used in uplink communication from wireless units 14 to BTS 12.

BTS 12 has an antenna array 16 consisting of a number of transmit antennas 18A, 18B, ..., 18M. Receive units 14 are equipped with antenna arrays 20 of N receive antennas (for details see Figs. 2, 4). BTS 12 sends transmit signals TS to all receive units 14 via channels 22A and 22B. For simplicity, only channels 20A, 20B between BTS 12 and receive units 14A, 14B are indicated, although BTS 12 transmits TS signals to all units shown. In this particular case receive units 14A, 14B are both

located within one cell **24**. However, under suitable channel conditions BTS **12** can transmit TS signals to units outside cell **24**, as is known in the art.

The time variation of channels **22A**, **22B** causes transmitted TS signals to experience fluctuating levels of attenuation, interference, multi-path fading and other deleterious effects. Therefore, communication parameters of channels **22A**, **22B** such as data capacity, signal quality or throughput undergo temporal changes. Thus, channels **22A**, **22B** can not at all times support efficient propagation of high data rate signals RS or signals which are not formatted with a robust coding algorithm. Antenna array **16** at BTS **12** can be used for spatial multiplexing, transmit diversity, beamforming to reduce interference, increase array gain and achieve other advantageous effects. Antenna arrays **20** at receive units **14** can be used for spatial multiplexing, interference canceling, receive diversity, increased array gain and other advantageous effect. All of these methods improve the capacity of channels **22A**, **22B**. The method of the invention finds an optimum combination of these techniques chosen adaptively with changing conditions of channels **22A**, **22B**. In other words, the method of the invention implements an adaptive and optimal selection of order of spatial multiplexing, order of diversity as well as rate of coding and bit-loading over transmit antenna array **16** to antenna array **20**.

Specifically, the method of the invention addresses these varying channel conditions by adaptively maximizing one or more communication parameters based on a quality parameter. Fig. 2 illustrates the fundamental blocks of transmit unit **12** and one receive unit **14** necessary to employ the method. Transmit unit **12** has a control unit **26** connected to a data processing block **28** for receiving data **30** to be formatted, coded and mapped to antennas **18A**, **18B**, ..., **18M** for transmission therefrom. An up-conversion and RF amplification block **32** supplies the transmit signals TS to antennas **18A**, **18B**, ..., **18M**.

On the other side of the link, receiving unit **14** has N antennas **34A**, **34B**, ..., **34N** in its array **20** for receiving signals RS. An RF amplification and down-

conversion block 36 processes RS signals and passes them to data processing block 38. A signal statistics unit 40 assesses a quality parameter of RS signals and/or recovered data 44 and feeds back quality parameter to control unit 26 of transmitter 12. The feedback is indicated by dashed line 42. Using this quality parameter, unit 26 controls data processing 28 to ensure appropriate spatial multiplexing, diversity processing, coding and mapping of data 30 such that a selected communication parameter or parameters are continuously maximized.

The details of a preferred embodiment of a transmit unit 50 for practicing the method of the invention are shown in Fig. 3. Data 52 to be transmitted is delivered to a data processing block 54, where it first passes through an interleaver and pre-coder 56. Interleaver and pre-coder 56 interleaves and pre-codes the stream of data 52, as is known in the art and sends the interleaved and pre-coded stream to serial to parallel converter 58. Converter 58, produces from the single data stream a number k of spatial-multiplexed streams SM_i , where $i=1...k$ and k is a variable, i.e., the number of streams SM_i is variable, subject to the condition that $1 \leq k \leq N$ and also $k \leq M$. In other words, the maximum number k of streams SM_i is limited by the lower of the number M of transmit antennas TA_1, TA_2, \dots, TA_M and the number N of receive antennas RA_1, RA_2, \dots, RA_N (see Fig. 4).

The value of k is controlled by an adaptive controller 60, which is part of control unit 62 and is connected to serial to parallel converter 58. The decision on the number k of streams SM_i can be made locally by adaptive controller 60 or it can be communicated from a receiver, as described below. In most systems, the decision relies on feedback 64 from receiver indicating a quality parameter or information from which adaptive controller 60 can derive the quality parameter. In other systems, for example Time Division Duplexed (TDD) system, where the channel is reciprocal, no extra feedback is necessary. In those cases the feedback is obtained from the transmit unit's own receive unit, as indicated in dashed lines.

Each of the k streams SM_i pass through a corresponding Space-Time Coder **65** (S-T Coder) of an S-T Coding Unit **66**. Each S-T Coder produces k' coded streams CS_h , where $h=1...k'$. The number k' is at least 1 and at most M , depending on the number of streams SM_i selected by adaptive controller **60**. In fact, adaptive controller **60** is also connected to S-T Coding unit **66** to also control the number k' .

Space-time coding is a known technique which combines conventional channel coding and antenna diversity. S-T coding splits an encoded data stream, in this case each of spatial-multiplexed streams SM_i into k' dependent data streams, in this case coded streams CS_h , each of which is modulated and simultaneously transmitted from a different transmit antenna TA . Various choices of mapping of data to transmit antennas TA_1, TA_2, \dots, TA_M can be used. All transmit antennas TA can use the same modulation format and carrier frequency. Alternatively, different modulation or symbol delay can be used. Other approaches include the use of different carrier frequencies (multi-carrier techniques) or spreading codes. The concept of S-T coding is further described in the literature (see, e.g., V. Tarokh et al., "Space-time codes for high data rate wireless communication: Performance criterion and code construction", IEEE Transactions on Information Theory, Vol. 44, No. 2, March 1998; and S.A. Alamouti, "A simple transmit diversity technique for wireless communications", IEEE Journal on selected areas in Communications, Vol. 16, pp. 1451-58, October 1998).

According to the method of the invention, each S-T code is imposed by corresponding S-T coder **65** and output in the form of k' streams CS_h . The constraint length of the code and value k' can be decided depending upon the computational complexity which can be afforded in the operation of the communication system. The coding rate and the modulation rate should be chosen depending upon the characteristics of the channel, i.e., depending on the communication parameter as reflected by the value of the quality parameter.

In the preferred embodiment a database **68** in control unit **62** contains the set of S-T codes to be used depending on the number k' and the quality parameter. Database

68 is connected to S-T Coding Unit 66 for supplying these S-T codes to the latter. Adaptive controller 60 is connected to database 68 to control the transfer of the S-T codes to S-T Coding Unit 66.

Each of the S-T codes stored in database 68 has an associated coding scheme and modulation scheme. The coding rate and modulation rate of the different S-T codes may be chosen to be different, such that each S-T code is suitable to given channel conditions, as indicated by the quality parameter. The choice of coding rates and modulation rates of the S-T codes can be further dictated by what communication parameter of the channel is to be optimized. Specifically, communication parameter such as data throughput requires that the S-T code with higher rate modulation and code be chosen.

For example, if the quality parameter which is fed back is SINR and the aim is to improve the throughput, then database 68 will contain the performance curves (BER versus SINR) for difference S-T codes for all possible transmit/receive configurations in terms of number M of transmit antennas TA_1, TA_2, \dots, TA_M and number N of receive antennas RA_1, RA_2, \dots, RA_N . Fig. 8 shows the performance of three typical S-T codes. As can be seen, to achieve a BER of value q, which is suitable for the application (e.g., voice data transmission), and the prevailing average SINR has to have a value p or less only S-T codes 1 and 2 are suitable. S-T code 3 is not suitable because at SINR value p its BER is too high. Now, when the communication parameter to be maximized is the throughput, an additional choice is be made between S-T code 1 and S-T code 2 and the one maximizing throughput is selected. A person of average skill in the art will see that this process or a similar process can be employed to maximize any of the communication parameters. In addition, preferably, database 68 contains the necessary performance curves to select the proper S-T codes, values of k and G(z) matrix sets to use. However, empirically collected data may also be used.

In the preferred embodiment, k' is equal to the number M of transmit antennas TA_1, TA_2, \dots, TA_M . Each S-T coder 65 uses the S-T code indicated by adaptive

controller 60 and the codes used by individual S-T coders 65 can be the same or different. Alternatively, the k spatial-multiplexed streams SM_i can also be S-T coded jointly to provide only one set of k' coded streams CS_h . Joint S-T coding typically incurs a higher computational complexity as opposed to separate S-T coding. Joint S-T coding is preferable if the computational complexity is acceptable. A person of average skill in the art will be able to make the appropriate design choice in any given case.

A transmit processing unit 72 receives coded streams CS_h and produces M transmit signals TS_1, TS_2, \dots, TS_M for transmission. An Up-conversion and RF Amplification unit 74, as is well-known in the art, receives the M transmit signals TS_p , prepares them as necessary, and transmits them from antennas TA.

The conversion of coded streams CS_h is performed by the application of k $M \times M$ space-time (or alternatively space-frequency) filtering matrix set $G(z)$ to all inputs ($M=k'$). The choice of matrix set $G(z)$ is based on the quality parameter. For this reason adaptive controller 60 is connected to unit 72 to adaptively control the selection of matrix set $G(z)$.

Preferably, database 68 is also connected to unit 72 and contains stored parameters of suitable matrix sets $G(z)$ for any given channel conditions or the matrix sets $G(z)$ themselves. In the latter case adaptive controller 60, which is also connected to database 68, instructs database 68 to download the appropriate matrix set $G(z)$ into transmit processing unit 72 as the channel conditions change. The choice of matrix set $G(z)$ is made to facilitate the separability of the k spatial-multiplexed streams SM_i at the receiver. Matrix set $G(z)$ can incorporate diversity techniques such as delay/switched diversity or any other combining techniques known in the art. For example, when no channel information is available at transmit unit 50, e.g., at system initialization or at any other time, then matrix set $G(z)$ (which consists of k $M \times M$ matrices) is made up of k matrices of rank $M \times k$ such that the subspaces spanned by these matrices are mutually orthogonal to ensure separability of k streams at receive

unit **80**. The task of finding such matrices can be performed by a person of average skill in the art. During operation, as the quality parameter changes, other sets of matrices $G(z)$ can be also used.

It is important to note, that S-T Coding Unit **66** and transmit processing unit **72** together operate on the k spatial-multiplexed streams SM_i to map them into transmit signals TS_p , where $p=1...M$, which are assigned to the corresponding transmit antennas TA_1, TA_2, \dots, TA_M . In other words, S-T Coding Unit **66** in conjunction with transmit processing unit **72** form an antenna mapping unit which maps streams SM_i to transmit antennas TA_1, TA_2, \dots, TA_M in accordance with the above-described rules. The mapping is adjusted by adaptive controller **60** with the aid of S-T codes and matrices $G(z)$ stored in database **68** as a function of the quality parameter indicative of the channel conditions.

Transmit unit **50** preferably also has a training unit **70** drawn in dashed lines to include training data, as is known in the art. The training data can be inserted at any appropriate location before or after S-T Coding Unit **66** and delivered to transmit processing unit **72**. The training data can be sent in a separate control channel or together with data **52**. A person of average skill in the art will be familiar with the necessary techniques and requirements.

Fig. 4 shows the block diagram of a corresponding receiver **80** for receiving signals transmitted from transmit unit **50**. Specifically, receiver **80** has an array of N receive antennas RA_1, RA_2, \dots, RA_N to receive RS_j receive signals, where $j=1...N$. An RF amplification and down-conversion block **82** amplifies and converts signals RS_j and performs any other required operations (e.g., sampling, analog-to-digital conversion). Then, signals RS_j are passed on to both a matrix channel estimator **84** and a receive processing unit **86**.

Matrix channel estimator **84** estimates the channel coefficients using known training patterns, e.g., the training patterns provided by training unit **70** in accordance with known techniques. In the present case, the output of estimator **84** is $\hat{A}(z)$:

$$A(z)=G(z)H(z),$$

where $G(z)$ is the matrix applied by transmit processing block **72**, and $H(z)$ is the matrix of pure channel coefficients. $G(z)$ is a set of $M \times M$ matrices while $H(z)$ is an $M \times N$ matrix. The resulting matrix $\hat{A}(z)$ is an $M \times N$ matrix and represents channel estimates for received signals RS_1, RS_2, \dots, RS_N after digitization. The channel estimates supplied to receive processing block **86** by estimator **84** are used by the latter to recover the k spatial-multiplexed streams SM_i . In fact, any of the well-known receive processing techniques such as zero-forcing (ZF), MMSE, LS, ML etc. can be used for processing received signals RS_1, RS_2, \dots, RS_N .

The recovered k coded streams are supplied to both an S-T Decoding Unit **88** and to a signal statistics of receive streams unit **90**. S-T Decoding Unit **88** has S-T decoders **89** which reverse the coding of S-T coders **65** of transmit unit **50**. The S-T codes to be applied are supplied to unit **88** by a database **92**. S-T decoding will be discussed in more detail below in reference to Fig. 5.

Signal statistics unit **90** analyzes receive signals RS_j converted to k streams by receive processing block **86** to assess the quality parameter. In the preferred embodiment, unit **90** is an averaging unit which averages signal statistics over time. Unit **90** computes the signal statistics of each of the k streams including signal-to-interference noise ratio (SINR), signal-to-noise ratio (SNR), power level, level crossing rate (LCR), level crossing duration at a given signal threshold and reception threshold or other signal parameters.

For example, when receive processing is performed with the ZF (zero-forcing) method, unit **90** computes SINR in accordance with the following algorithm:

$$SINR = \left\langle \left\| \hat{A}^{-1} * Y - A \right\|^2 \right\rangle,$$

where the brackets denotes the expectation value, X is the transmitted sequence and Y is the received sequence. LCR is the rate at which the signal level goes below a set level. LCR can be computed for different signal level thresholds. SINR and LCR both give an indication of the error properties of the channel. The window size (duration) over which these statistics are computed and averaged by unit 90 can be changed depending upon the kind of channel receive unit 80 sees.

For a given threshold level and LCR the error probability will depend upon the type of S-T codes used (which includes the coding and modulation aspects of the S-T codes) and the number k of spatial-multiplexed streams SM_i used by transmit unit 50. The value of k is dictated by the separability of spatial signatures at receive unit 50.

Thus, the choice of S-T codes for a separable k of spatial-multiplexed streams SM_i can be based on the LCR and LC duration at a given threshold level and a maximum acceptable error rate. Average SINR can also give similar kind of information. This error information is used directly by unit 90 as the quality parameter or is used to derive the quality parameter. The other signal criteria can be used in a similar fashion to be employed by unit 90 directly as the quality parameter or to derive a quality parameter.

Alternatively, and preferably in addition to unit 90 a signal statistics of output streams unit 94 is used to analyze reconstructed streams SM_i obtained from S-T Decoding Unit 88. Once again, unit 94 can perform the same statistical computations of reconstructed streams SM_i to obtain signal statistics including signal-to-interference noise ratio (SINR), signal-to-noise ratio (SNR), power level, level crossing rate (LCR), level crossing duration and reception threshold or other signal parameters. Meanwhile, reconstructed streams SM_i are converted to a serial stream by parallel to serial converter 96. Then, they are de-interleaved and decoded by de-interleaver and decoder 98 to recover data 52' (the prime indicates that the recovered data may differ from

original data **52** due to transmission errors) originally transmitted from transmit unit **50**.

The method of the invention employs the quality parameter or parameters obtained as described above to adjust at least the number k of spatial-multiplexed streams SM_i generated by serial to parallel converter **58** of transmit unit **50**. Preferably, the quality parameter or parameters are also used to control the S-T coding of unit **66**, e.g., the selection of number k' , and transmit processing, i.e., the selection of matrix set $G(z)$ of transmit processing unit **72** of transmit unit **50**.

During regular operation, transmit unit **50** selects $G(z)$, k , k' and S-T codes at system initialization. These parameters are then updated as the channel changes. Transmit unit **50** sends control information **102** (see Fig. 5), including the S-T codes used, the value k , the matrix set $G(z)$ being applied by transmit processing unit **72** etc. regularly to receive unit **80**. Alternatively, this information may be transmitted only once during initialization of a communication session and then updated as required (e.g., only when one of these pieces of information changes).

Fig. 5A illustrates in more detail how adaptive control of $G(z)$, k , k' and S-T codes is accomplished. Streams S_1 through S_k are supplied to unit **90** while reconstructed spatial-multiplexed streams SM_1 through SM_k are supplied to unit **94**. Both units **90**, **94** compute the signal statistics as described above. Then, units **90**, **94** communicate their signal statistics or quality parameters to an S-T Code Lookup block **100**. Based on these block **100** makes a decision on the most suitable S-T code and value of k to be used. This decision is passed on as feedback **64** to transmitter **50**. Alternatively, block **100** passes on the signal statistics as feedback **64** to adaptive control **60** of transmit unit **50**. In this case, adaptive control **60** selects the appropriate S-T codes and k value. The decisions on the use of appropriate matrix set $G(z)$ is also made by adaptive control **60** based on feedback **64**.

Of course, in order to recover data **52**, receiver **80** has to use the appropriate S-T codes and know the number k . This information is available to it either from block **100**, which can supply this information to database **92** of S-T codes which is connected to S-T Decoding Unit **88** (see Fig. 4) or from control channel information **102** transmitted by transmit unit **50**, as mentioned above. In case control channel information **102** is used, an S-T code, k indicator **104** receives the information and communicates it to database **92**. During system start-up indicator **104** can either start with the last used configuration or start with value $k=1$ and a particular S-T code and $G(z)$ matrix set. Alternatively, it can start with any agreed upon configuration. Of course, the configuration will be updated during the session to maximize a communication parameter.

The adjustment of k , S-T codes and selection of matrix set $G(z)$, whether suggested by block **100** or determined by adaptive control **60**, is made to maximize or optimize a communication parameter under the changing channel conditions. Typically, the communication parameter to be maximized is either the channel capacity, signal quality, SNR or throughput. Channel capacity will be maximized by selecting the largest possible value of k and a high throughput S-T code (high modulation rate and low coding overhead). The reduction of k increases the order of diversity. In this case, the signal quality improves but throughput decreases. The SNR will be maximized if $k=1$, but this, will minimize the channel capacity. Hence adaptive control **60** (or block **100**) has to decide an optimum k if both channel capacity and signal quality are to be maximized.

In addition, in case the method of the invention is implemented in a system with frequency re-use, e.g., a cellular network with frequency re-use, the receive unit is likely to see interference. In addition, the method of invention is preferably implemented in conjunction with interference mitigation, as is known in the art. In that case, the choice of S-T codes, the number k and matrix set $G(z)$ should be done in such a way that interference mitigation is also carried out side by side. When the method of

the invention is implemented with interference mitigation some reduction of order of diversity or spatial multiplexing may occur.

In an alternative embodiment, S-T Decoding Unit **88** can be a joint S-T decoder for producing k reconstructed streams SM_i rather than the group of S-T decoders **89** as shown in Fig. 4. Joint or separate decoding strategy depends upon the coding strategy employed by transmit unit **50** and can be reconfigured.

In alternative embodiments different types of coders can replace the S-T coders. For example, the decoding unit can be a space-frequency coder, and adaptive modulation rate coder or other suitable coding device. The space-time and space-frequency coders can use different coding and modulation rates.

In yet another embodiment, as shown in Fig. 5B, receive unit **80** can take advantage of additional data analysis blocks **110** and **112** to compute additional data statistics after parallel to serial conversion and after the de-interleaving and final decoding steps. These data statistics could be BER or packet error rate. This information can also be fed back to transmit unit **50** to adjust the parameters k , k' , S-T coding and selection of matrix set $G(z)$. Alternatively, this information can be sent to unit **100** for local determination of the parameters.

The system can be based on any multiple access technique including TDMA, FDMA, CDMA and OFDM. For example, the adaptations necessary to transmit unit **50** and receive unit **80** for implementation in an OFDM system are illustrated in Figs. 6 and 7. Specifically, Fig. 6 illustrates the adaptation of transmit unit **50** to operate in an OFDM system. In this case transmit signals from transmit processing unit **72** have to be converted to parallel by serial-to-parallel converters (S/P) **120**. In this case, training unit **70** also provides the training patterns directly to S/P converters **120** in this case. Next, the parallel transmit signals are inverse fast Fourier transformed by IFFT's **122** and again transformed to serial by parallel-to-serial converters (P/S) **124**. Then, the

signals are up-converted and amplified for RF transmission from transmit antennas TA_1, \dots, TA_M .

Fig. 7 illustrates the adaptation to receive unit **80** necessary to receive OFDM signals as transmitted for transmit unit **50** adapted as shown in Fig. 6. Specifically, receive signals are received by receive antennas RA_1, \dots, RA_N and the down-converted and amplified by the corresponding blocks. Then, the signals are converted from serial to parallel by S/P converters **126**. Fast Fourier transform (FFT) blocks **128** 1 through **N** then transform the signals and pass them on to both a space-frequency (S-F) matrix channel estimator **130** and to the receive processing block **132**. From there, the processing of the receive signals proceeds as in receive unit **80**.

It will be clear to one skilled in the art that the above embodiment may be altered in many ways without departing from the scope of the invention. Accordingly, the scope of the invention should be determined by the following claims and their legal equivalents.

CLAIMS

What is claimed:

1. A method of maximizing a communication parameter of a channel between a transmit unit having a number M of transmit antennas and a receive unit having a number N of receive antennas, said method comprising the following steps:

- a) processing said data to produce parallel spatial-multiplexed streams SM_i , where $i=1...k$;
- b) mapping said spatial-multiplexed streams SM_i to transmit signals TS_p , where $p=1...M$, for transmission from said M transmit antennas to said receiver via said channel;
- c) receiving receive signals RS_j , where $j=1...N$ by said N receive antennas;
- d) assessing a quality parameter of said receive signals RS_j ; and
- e) using said quality parameter to adjust k to maximize said communication parameter of said channel.

2. The method of claim 1, wherein each of said spatial-multiplexed streams SM_i is processed by a coding unit to produce coded streams CS_h , where $h=1...k'$.

3. The method of claim 2, wherein said quality parameter is utilized in said transmitter to adjust the coding of said coding unit.

4. The method of claim 2, wherein said quality parameter is utilized in said transmitter to adjust k' .

5. The method of claim 2, wherein said coding unit is selected from the group consisting of space-time coders, space-frequency coders, adaptive modulation rate coders.

6. The method of claim 5, wherein said space-time coders and said space-frequency coders use different coding and modulation rates.
7. The method of claim 1, further comprising the step of receive processing said receive signals RS_j to reproduce said spatial-multiplexed streams SM_i .
8. The method of claim 7, wherein said quality parameter is obtained from said receive processed spatial-multiplexed streams SM_i .
9. The method of claim 8, wherein said quality parameter is derived by a statistical unit.
10. The method of claim 8, wherein said quality parameter is selected from the group consisting of signal-to-interference noise ratio, signal-to-noise ratio, power level, level crossing rate, level crossing duration.
11. The method of claim 1, further comprising the steps of processing said receive signals RS_j to reconstitute said data and obtaining said quality parameter from said data.
12. The method of claim 11, wherein said quality parameter is selected from the group consisting of bit-error-rate and packet error-rate.
13. The method of claim 1, wherein said mapping step further comprises a transmit processing step by a transmit processing block and said quality parameter is used for adjusting the transmit processing of said transmit processing block.
14. The method of claim 1, wherein said quality parameter is fed back to said transmitter.

15. The method of claim 1, wherein said step of processing said data comprises a technique selected from the group consisting of adaptive modulation, adaptive coding, Space-Time coding, and Space-Frequency coding.

16. The method of claim 1, wherein said transmit signals TS_p are formatted in accordance with at least one multiple access technique selected from the group consisting of TDMA, FDMA, CDMA, OFDMA.

17. The method of claim 1, wherein said communication parameter is selected from the group consisting of data capacity, signal quality and throughput.

18. The method of claim 1, wherein said receive unit and said transmit unit belong to a cellular communication system.

19. The method of claim 18, used in the downlink of said cellular communication system.

20. The method of claim 18, used in the uplink of said cellular communication system.

21. A communication system with an adaptively maximized communication parameter of a channel in which data is transmitted between a transmit unit having a number M of transmit antennas and a receive unit having a number N of receive antennas, said transmit unit comprising:

- a) processing means for processing said data to produce parallel spatial-multiplexed streams SM_i , where $i=1...k$;
- b) antenna mapping means for converting said spatial-multiplexed streams SM_i to transmit signals TS_p , where $p=1...M$, and transmitting said transmit signals TS_p from said M transmit antennas via said channel;

said receive unit receiving receive signals RS_j , where $j=1...N$, and said communication system comprising:

- a) means for assessing a quality parameter of said receive signals RS_j ; and
- b) means for adjusting k based on said quality parameter to maximize said communication parameter of said channel.

22. The communication system of claim 21, wherein said means for assessing said quality parameter comprises a statistical unit.

23. The communication system of claim 21, wherein said means for assessing said quality parameter is located in said receive unit.

24. The communication system of claim 21, wherein said means for assessing said quality parameter is located in said transmit unit.

25. The communication system of claim 21, further comprising a coding unit in said transmit unit for processing said spatial-multiplexed streams SM_i to produce coded streams CS_h , where $h=1...k'$.

26. The communication system of claim 25, wherein said means for adjusting k further comprises a mechanism for adjusting k' .

27. The communication system of claim 25, wherein said coding unit is selected from the group consisting of space-time coders, space-frequency coders, adaptive modulation rate coders.

28. The communication system of claim 25, further comprising a database of codes and antenna mapping parameters in communication with said coding unit and said antenna mapping means.

29. The communication system of claim 25, further comprising an adaptive controller in communication with said processing means, said coding unit and said antenna mapping means, said adaptive controller adjusting said processing means, said coding unit and said antenna mapping means based on said quality parameter.
30. The communication system of claim 21, wherein said means for adjusting k is located in said transmit unit.
31. The communication system of claim 21, further comprising an adaptive controller in communication with said processing means and said antenna mapping means, said adaptive controller adjusting said processing means and said antenna mapping means based on said quality parameter.
32. The communication system of claim 21, said communication system operating in accordance with at least one multiple access technique selected from the group consisting of TDMA, FDMA, CDMA, OFDMA.
33. The communication system of claim 21, wherein said communication system is a cellular communication system.
34. The communication system of claim 21 employing multi-carrier modulation.

1/6

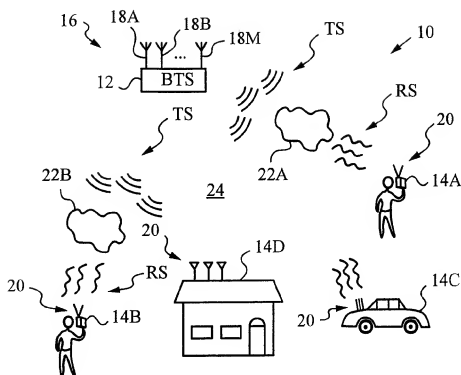


FIG. 1

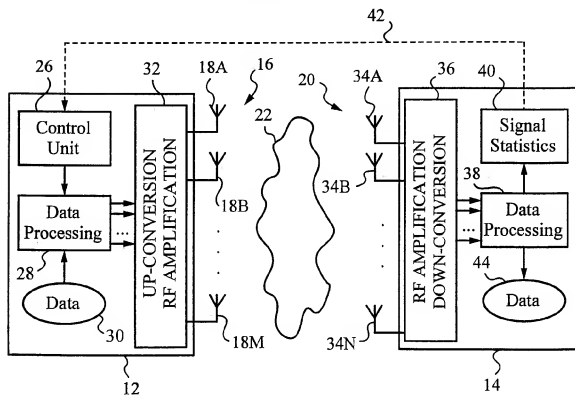


FIG. 2

2/6

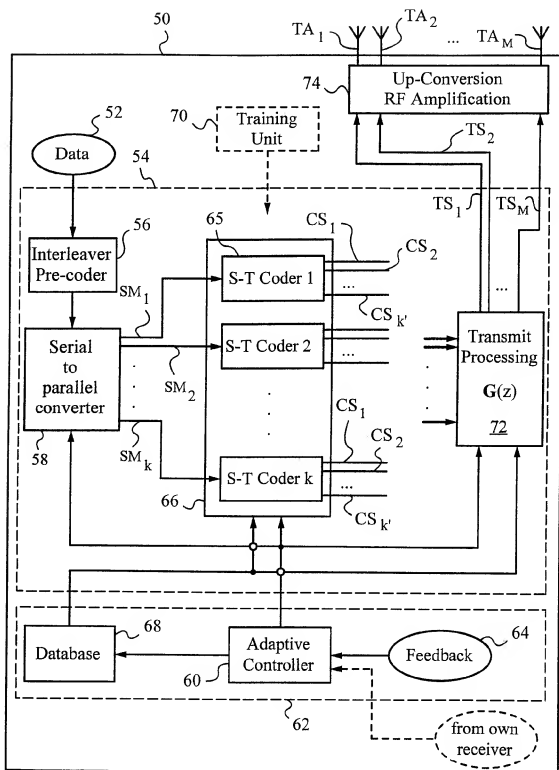


FIG. 3

3/6

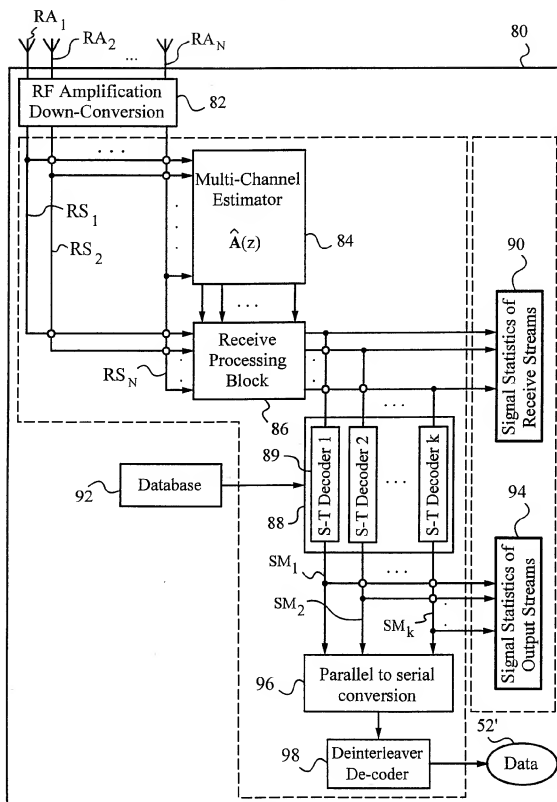


FIG. 4

4/6

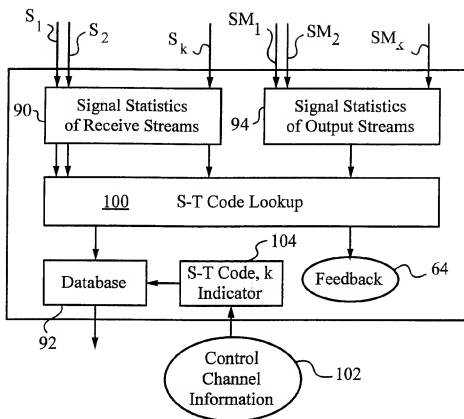


FIG. 5A

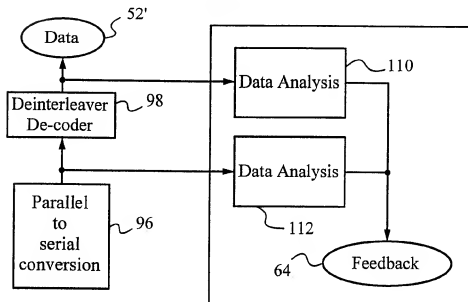


FIG. 5B

5/6

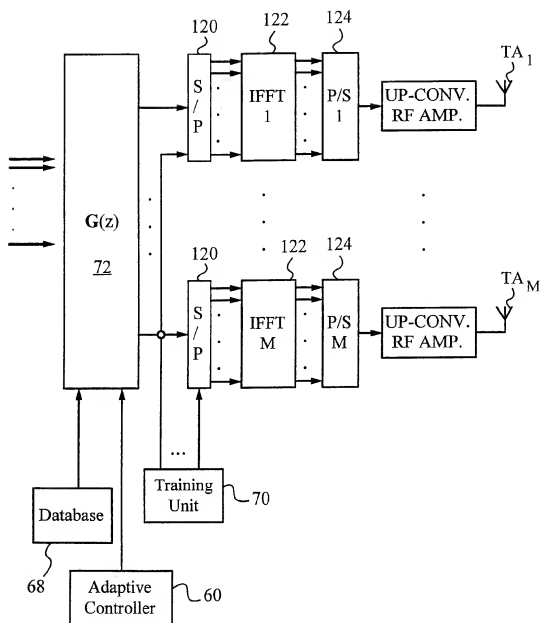


FIG. 6

6/6

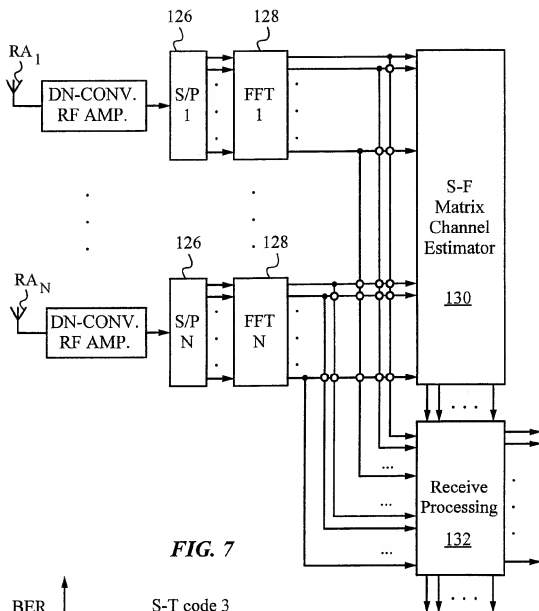


FIG. 7

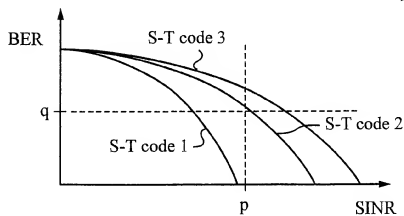


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/32994

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04B 7/02, 15/00; H04L 1/02

US CL : 375/267, 285

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 375/267, 285, 259, 260, 295, 296, 299, 316, 340, 346, 347; 370/310, 329, 332, 334

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	US 6,067,290 A (PAULRAJ et al) 23 May 2000, abstract and figures.	1-3, 5, 7, 8, 11-16, 18-21, 23-25, 27, 30 and 32-34
X	WO 98/09381 A1 (RALEIGH et al) 05 March 1998, abstract and figures.	1, 2, 7, 21 and 25
A	US 5,592,490 A (BARRATT et al) 07 January 1997, abstract.	1 and 21
A	US 5,642,353 A (ROY, III et al) 24 June 1997, abstract.	1 and 21
A	US 5,828,658 A (OTTERSTEN et al) 27 October 1998, abstract.	1 and 21

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

12 FEBRUARY 2001

Date of mailing of the international search report

23 APR 2001

 Name and mailing address of the ISA/US
 Commissioner of Patents and Trademarks
 Box PCT
 Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

LENNY JIANG

Telephone No. (703) 305-6740

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/32994

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,P	US 6,108,565 A (SCHERZER) 22 August 2000, abstract.	1 and 21